


TEMPORARY CONSTRUCTION THERMOSTAT

The Temp-Stat™ is a temporary construction thermostat preset to a non-adjustable temperature for energy savings during construction.

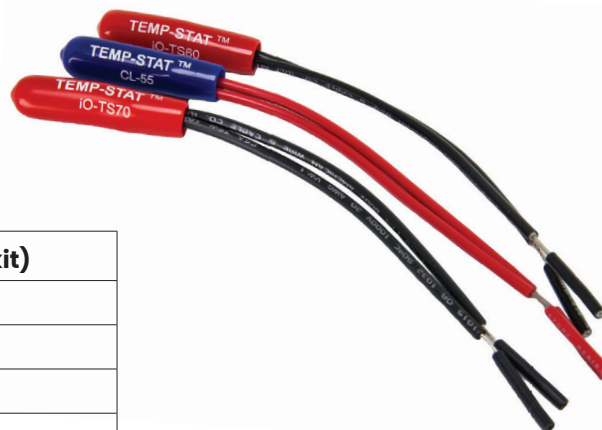

Specifications:

Input Voltage	24VAC, 1A (line voltage control requires a relay kit)	
Heating Only	iO-TS60	60°
	iO-TS65	65°
	iO-TS70	70°
	iO-TS75	75°
	iO-TS41	41° Warehouse Thermostat
Cooling Only	iO-CL70	70°
	iO-CL75	75°
	iO-CL80	80°
	iO-CL55	55° Compressor Lockout

Warranty:

- 1 year

FLUSH-MOUNTED, TAMPER-RESISTANT THERMOSTATS

This concealed thermostat is designed to control unit heaters, cabinet heaters, in-wall heaters, fan coils or air conditioning units. Common applications include locker rooms, entry ways, warehouses and hallways.

Specifications:

Input Voltage	24VAC, 1A (line voltage control requires a relay kit)	
Heating Only	iO-CS41WP	41°
	iO-CS60WP	60°
	iO-CS65WP	65°
	iO-CS70WP	70°
Cooling Only	iO-CSAC70WP	70°
	iO-CSAC75WP	75°
Accessories	iO-CSRY120	Relay kit for 120 volt control circuits
	iO-CSRY240	Relay kit for 240 volt control circuits



Warranty:

- 1 year