



Submittal Data Sheet

3.0-Ton R-32, 4-Port Heat Pump, Ductless ODU
4MXM36AVJU9

FEATURES

- Connect 2 to 4 indoor units with a single outdoor unit
- High-efficiency inverter driven swing compressor
- Cooling Operating Limit (14°~114.8°F/-10°~46°C)
- Heating Operating Limit (5°~59.9°F/-15°~15.5°C)
- Anti-corrosion treatment of outdoor heat exchanger
- Specialized drain pan design for improved cold climate drainage
- Pre Charged to 131.6ft (40 m)
- Night Quiet Mode
- Automatic Defrost
- Quick Warming Function
- Priority Room Setting
- Cool/Heat mode lock
- Unit performs self diagnosis and indicates results using LED lights
- Wiring error check function
- PAM Control



BENEFITS

- Single Fan allows for multiple installation locations
- 12 year residential limited parts and compressor warranty with online registration
- 5 Year limited parts warranty for commercial applications
- Long piping lengths, up to 230 ft
- High efficiency cooling and heating operation provides utility bill savings
- Multiple indoor unit style options available



Submittal Data Sheet

3.0-Ton R-32, 4-Port Heat Pump, Ductless ODU
4MXM36AVJU9

EFFICIENCY					PERFORMANCE			
	SEER2	EER2	HSPF2	COP	COOLING:		HEATING:	
Non-Ducted:	20.00	10.00	9.50		Rated (Btu/hr):	34,200	Rated (Btu/hr):	34,600
Ducted:					Operating Range:	14°F - 115°F	Operating Range:	5°F - 60°F
Mixed:	10.00	5.00	4.75	0	Rated Cooling Conditions:		Rated Heating Conditions:	
					Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75		Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43	

ELECTRICAL			PIPING			
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.		*208-230 / 60 / 1	Max. System Piping Length: (feet):	230	Gas Conn. (inch):	3/8
System MCA: (Min.circuit amps)		24.1	Max. Interunit Piping Length: (feet):	230	Liquid Conn. (inch):	1/4
System MFA: (Max.fuse amps)		25.0	Max. Height Difference IDU to ODU (feet):	49.25	Drain Conn. (inch):	5/8
Compressor RLA: (Rated load amps)		18.5	Max. Height Difference IDU to IDU (feet):			
Outdoor fan motor FLA: (Full load amps)			Refrigerant Pre-Charged Pipe Length (ft):	131.25		
Outdoor fan motor W: (Rated output watts)		150.0				

SPECIFICATIONS					
Compressor Type:	Swing	Compressor Stage:	Inverter		
Refrigerant Type:	R-32	Refrigerant Oil:	PVE (FVC50K)		
Factory Charge (Lbs):	4.9	Additional Refrigerant Charge (Ozs/ft):	0.22		
COOLING - Airflow Rate (cfm):			HEATING - Airflow Rate (cfm):		
High:	2,896	High:	2,518		
Med:	2,402	Med:	2,518		
Low:	2,055	Low:	1,070		
Sound Level (dBA):	56	Sound Level (dBA):	60		
Dimensions (HxWxD) (in):	29-1/2 x 34-1/4 x 12-5/8	Net Weight (lb):	142		




Submittal Data Sheet

3.0-Ton R-32, 4-Port Heat Pump, Ductless ODU
4MXM36AVJU9

DIMENSIONAL DRAWING

4MXM36AVJU9

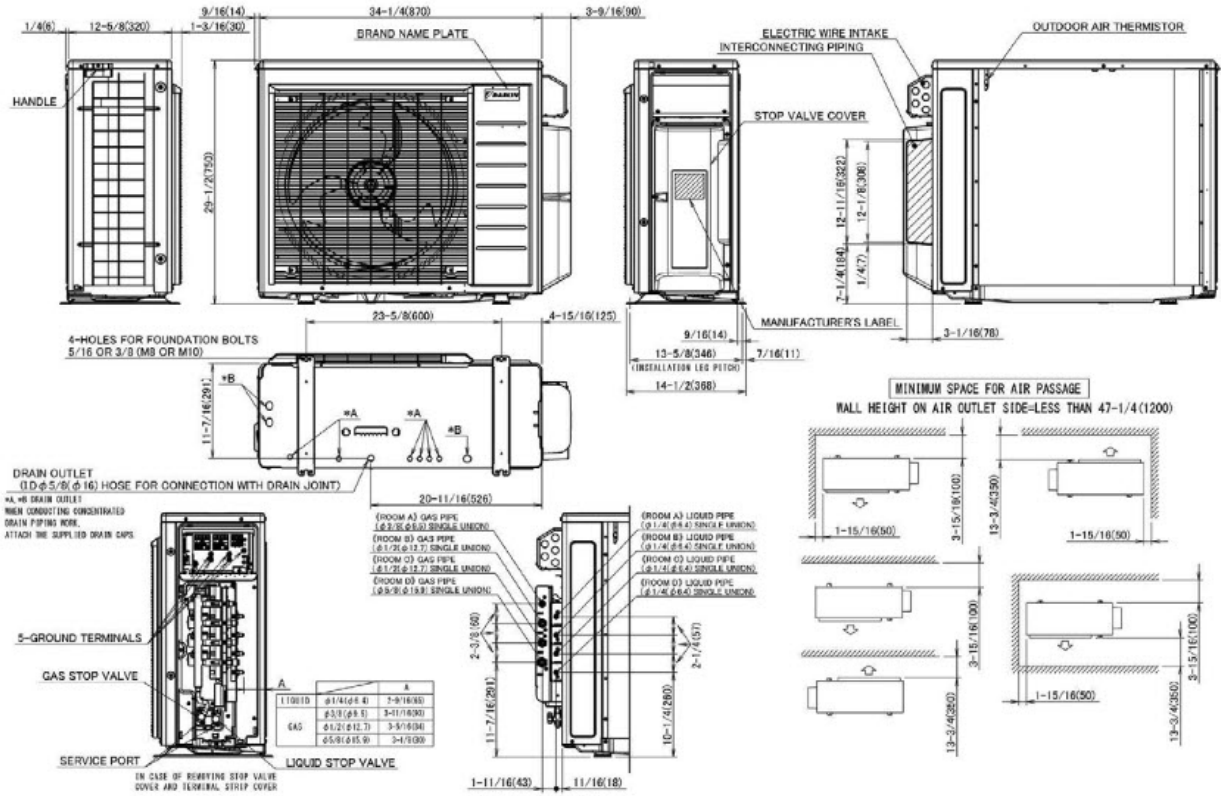

3D149809



Submittal Data Sheet

3.0-Ton R-32, 4-Port Heat Pump, Ductless ODU

4MXM36AVJU9

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
-------------	-------------	----------

KEH064A41	Drain Pan Heater	No
KPS063A41	Snow hood (intake side plate) (15, 18 & 24)	No
KPS063A44	Snow hood (intake rear plate) (15,18 & 24)	No
KPS063A47	Snow hood (outlet) (15, 18 & 24)	No
KPW063B4	Air direction adjustment grille	No