

SUBMITTAL DATA: MSZ-GE06NA..... 6,000 BTU/H WALL-MOUNTED INDOOR UNIT FOR MXZ-B MULTI-ZONE HEAT-PUMP SYSTEMS

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For ☐ Reference ☐ Approval ☐ Construction	
System Designation:	Schedule No.:	

GENERAL FEATURES

- Wall-mounted indoor unit
- Standard Hybrid Catechin Prefilter is included with indoor unit
- Quiet operation
- Choice of fan speeds: Quiet, Low, Medium, High, and Super High; Auto fan speed control also included
- Wireless remote controller is included; PAR-21MAA wired remote controller can be installed as an option
- Indoor unit powered from outdoor unit using A-Control
- Auto restart following a power outage
- Limited warranty: five years on parts and defects and seven years on compressors

OPTIONAL ACCESSORIES
Indoor Unit

- ☐ Condensate Pump (230V; SI3100-230)
- ☐ Anti-allergy Enzyme Filter (Two pieces per set; MAC-408FT-E)

Controller Options

- ☐ Wall-mounted Wired Remote Controller (PAR-21MAA requires MAC-397IF)
- ☐ MA Contact Terminal Interface (MAC-397IF)
- ☐ M-NET Control Adapter (MAC-399IF)
- ☐ Remote Temperature Sensor (M21-JKO-307)
- ☐ Lockdown Bracket for Handheld Controller (RCMKP1CB)

Cooling Capacity* 6,000 Btu/h

Heating Capacity* 7,200 Btu/h

* Rating Conditions (Cooling) - Indoor: 80°F (27°C) DB, 67°F (19°C) WB; Outdoor: 95°F (35°C) DB, 75°F (24°C) WB.

(Heating at 47°F) - Indoor: 70°F (21°C) DB, 60°F (16°C) WB; Outdoor: 47°F (8°C) DB, 43°F (6°C) WB.

(For data on specific indoor units [all ducted, all non-ducted, and both ducted and non-ducted] combinations, see the MXZ-B Technical and Service Manual.)

Electrical Requirements

Power Supply 208 / 230V, 1-Phase, 60 Hz
MCA 1 A

Voltage

Indoor - Outdoor S1-S2 AC 208 / 230V
Indoor - Outdoor S2-S3 DC 12-24V

Fan Motor 0.76 F.L.A.



Indoor Unit: MSZ-GE06NA



Wireless Remote Controller

Airflow (Quiet - Lo - Med - Hi - Super Hi)

Cooling 145 - 170 - 237 - 321 - 399 Dry CFM
109 - 134 - 201 - 286 - 364 Wet CFM

Heating 145 - 170 - 233 - 321 - 406 CFM

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)

Cooling 19 - 22 - 30 - 37 - 43 dB(A)
Heating 19 - 22 - 30 - 37 - 43 dB(A)

DIMENSIONS	UNIT INCHES / MM
W	31-7/16 / 799
D	9-1/8 / 232
H	11-5/8 / 295

Weight 22 lbs. / 10 kg

External Finish Munsell No. 1.0Y 9.2 / 0.2

Field Drainpipe Size O.D. 5/8" / 15.88 mm

Refrigerant Type R410A

Refrigerant Pipe Size O.D.

Gas Side 3/8" / 9.52 mm

Liquid Side 1/4" / 6.35 mm

Connection Method Flared

MXZ-B SERIES HEAT-PUMP OUTDOOR UNITS



Outdoor Unit: MXZ-4B36NA

MXZ-B MULTI-ZONE SYSTEMS CAN INCLUDE:

- Ducted Indoor Units:
SEZ-KD09,12,15,18NA, PEAD-A24AA
 - Nonducted Indoor Units:
**MSZ-GE06,09,12,15,18,24NA,
MSZ-FE09,12,18NA, MFZ-KA09,12,18NA,
PCA-A24KA, SLZ-KA09,12,15NA, and
PLA-A12,18,24BA**
 - A combination of both Ducted and Nonducted Indoor Units
- Refer to the separate submittal forms for the MSZ-GE, MSZ-FE, MFZ-KA, SEZ-KD, SLZ-KA, PEAD, PCA, PLA Indoor Units, and MXZ Outdoor Units.



MSZ-GE



SEZ-KD and PEAD-A24



MSZ-FE



MFZ-KA



PCA-KA




SLZ-KA and PLA-ABA



DIMENSIONS: MSZ-GE06NA

Unit: inch

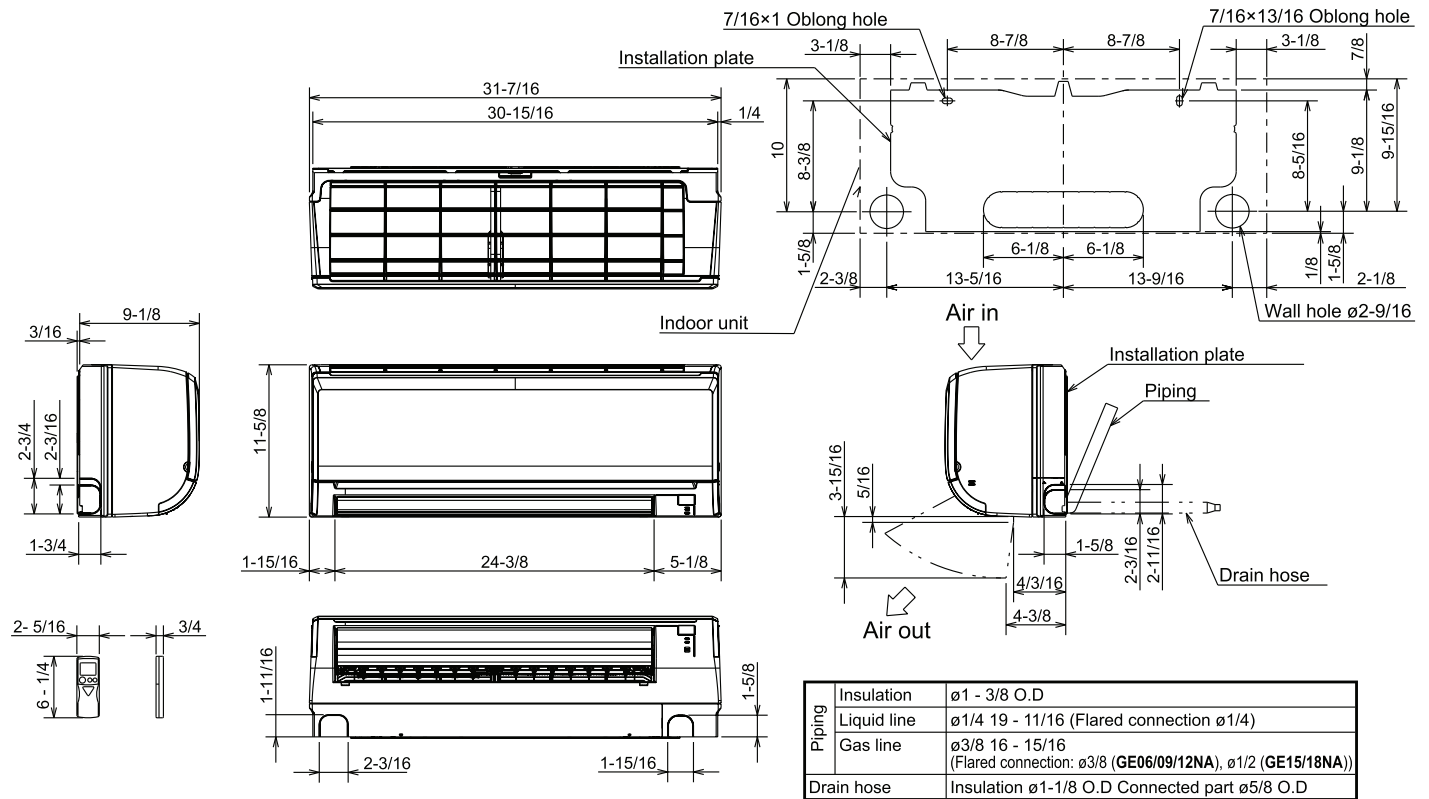

HVAC Advanced Products Division
 3400 Lawrenceville Suwanee Rd
 Suwanee, GA 30024
 Tele: 678-376-2900 • Fax: 800-889-9904
 Toll Free: 800-433-4822 (#3)
 www.mehvac.com
 Specifications are subject to change without notice.

SUBMITTAL DATA: MSZ-GE09NA-8 & MUZ-GE09NA

9,000 BTU/H WALL-MOUNTED HEAT-PUMP SYSTEMS

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For ☐ Reference ☐ Approval ☐ Construction	
System Designation:	Schedule No.:	



Indoor Unit: MSZ-GE09NA-8


Wireless Remote
Controller


Outdoor Unit: MUZ-GE09NA

GENERAL FEATURES

- Wall-mounted indoor unit
- Standard Hybrid Catechin Prefilter is included with indoor unit
- Quiet operation
- Auto fan speed control: Quiet, Low, Medium, High, and Super High
- Hand-held Wireless Remote Controller
- Indoor unit powered from outdoor unit using A-Control
- Auto restart following a power outage
- Base heater is available as an option
- Anti-allergy Enzyme Filter
- Limited warranty: five years parts and seven years compressor

ACCESSORIES

Outdoor Unit

- ☐ Base Heater (MAC-640BH-U)
- ☐ Drain Socket Assembly (MAC-860DS)

Indoor Unit

- ☐ Condensate Pump (230V; SI3100-230)

Controller Options

- ☐ Wireless Wall-mounted Remote Controller Kit (MHK1)*
- ☐ Portable Central Controller (MCCH1)*
- ☐ Outdoor Air Sensor (MOS1)*

*See Submittal for information on each option.

- ☐ Wired Wall-mounted Controller (PAR-31MAA requires MAC-333IF)
- ☐ System Control Interface (MAC-333IF)



SPECIFICATIONS: MSZ-GE09NA-8 & MUZ-GE09NA

Cooling*

Rated Capacity 9,000 Btu/h
Minimum Capacity 3,800 Btu/h
SEER 21.0 Btu/h/W
Total Input 660 W

Heating at 47°F*

Rated Capacity 10,900 Btu/h
Minimum Capacity** 4,500 Btu/h
HSPF 10.0 Btu/h/W
Total Input 760 W

Heating at 17°F*

Rated Capacity 6,600 Btu/h
Rated Total Input 700 W
Maximum Capacity** 8,700 Btu/h
Maximum Total Input 950 W

* Rating Conditions per AHRI Standard

Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB
Cooling | Outdoor: 95° F (35° C) DB / 75° F (24° C) WB
Heating at 47°F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB
Heating at 47°F | Outdoor: 47° F (8° C) DB / 43° F (6° C) WB
Heating at 17° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB
Heating at 17° F | Outdoor: 17° F (-8° C) DB / 15° F (-9° C) WB

**** Maximum Capacity is at full speed and performance for INVERTER-driven System.**

Electrical Requirements

Power Supply 208 / 230V, 1-Phase, 60 Hz
Breaker Size 15 A

OPERATING RANGE

		Indoor Intake Air Temp.	Outdoor Intake Air Temp.
Cooling	Maximum	90° F (32° C) DB, 73° F (23° C) WB	115° F (46° C) DB
	Minimum	67° F (19° C) DB, 57° F (14° C) WB	14° F (-10° C) DB
Heating	Maximum	80° F (27° C) DB, 67° F (19° C) WB	75° F (24° C) DB, 65° F (18° C) WB
	Minimum	70° F (21° C) DB, 60° F (16° C) WB	-4° F (-20° C) DB, -5° F (-21° C) WB

Voltage

Indoor - Outdoor S1-S2 AC 208 / 230V
Indoor - Outdoor S2-S3 DC ±24V
Indoor - Remote Controller MKH1 DC 3V
PAR-31MAA DC 12V

Indoor Unit

MCA 1 A
Blower Motor (ECM) 0.76 F.L.A.
Airflow (Quiet - Low - Medium - High - Super High)
Cooling 145 - 170 - 237 - 321 - 399 Dry CFM
109 - 134 - 201 - 286 - 364 Wet CFM
Heating 145 - 170 - 237 - 321 - 406 Dry CFM

Sound Pressure Level (Quiet - Low - Medium - High - Super High)
Cooling 19 - 22 - 30 - 37 - 43 dB(A)
Heating 19 - 22 - 30 - 37 - 43 dB(A)

DIMENSIONS	UNIT INCHES / MM
W	31-7/16 / 799
D	9-1/8 / 232
H	11-5/8 / 295

Weight 22 lbs. / 10 kg
External Finish Munsell No. 1.0Y 9.2 / 0.2
Field Drainpipe Size O.D. 5/8" / 15.88 mm

Outdoor Unit

Compressor DC Inverter-driven
MCA 12 A
Fan Motor (ECM) 0.50 F.L.A.
Sound Pressure Level
Cooling 46 dB(A)
Heating 50 dB(A)

DIMENSIONS	INCHES / MM
W	31-1/2 / 800
D	11-1/4 / 286
H	21-5/8 / 549

Weight 66 lbs. / 30 kg
External Finish Munsell No. 3Y 7.8 / 1.1


Refrigerant Type R410A
Refrigerant Pipe Size O.D.
Gas Side 3/8" / 9.52 mm
Liquid Side 1/4" / 6.35 mm
Max. Refrigerant Pipe Length 65 ft. / 20 m
Max. Refrigerant Pipe Height Difference 40 ft. / 12 m
Connection Method Flared

Notes:

DIMENSIONS: MSZ-GE09NA-8 & MUZ-GE09NA


MSZ-GE09NA-8

Unit: inch

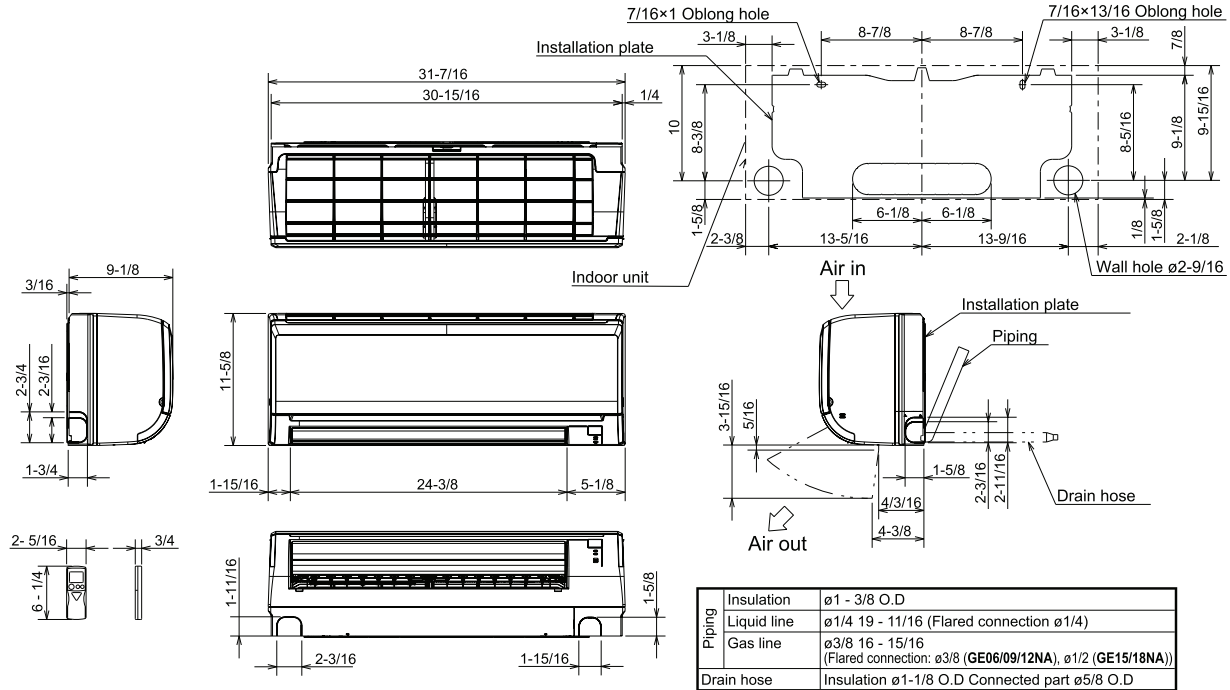


MUZ-GE09NA

Unit: inch

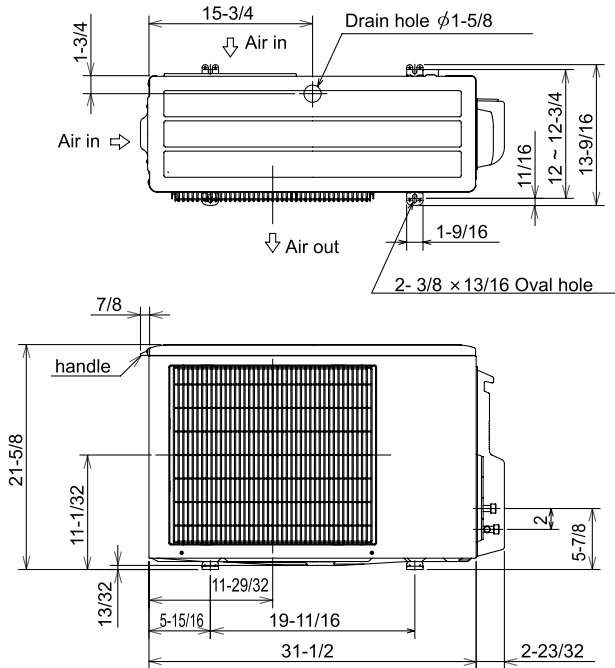

REQUIRED SPACE

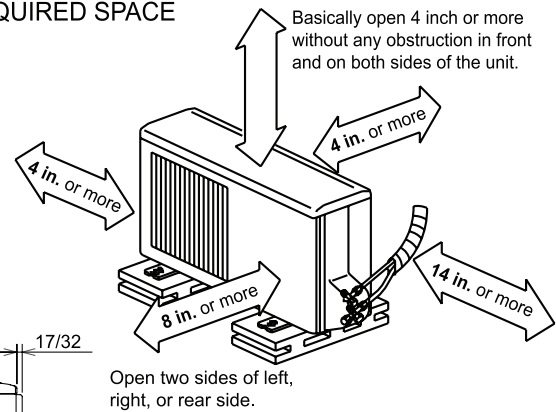

Intertek



1340 Satellite Boulevard
Suwanee, GA 30024
Tele: 678-376-2900 • Fax: 800-889-9904
Toll Free: 800-433-4822
www.mehvac.com

SUBMITTAL DATA: MSZ-GE12NA 12,000 BTU/H WALL-MOUNTED INDOOR UNIT FOR MXZ-B MULTI-ZONE HEAT-PUMP SYSTEMS

Job Name: _____	Location: _____	Date: _____
Purchaser: _____	Engineer: _____	
Submitted to: _____	For ☐ Reference ☐ Approval ☐ Construction	
System Designation: _____	Schedule No.: _____	

GENERAL FEATURES

- Wall-mounted indoor unit
- Standard Hybrid Catechin Prefilter is included with indoor unit
- Quiet operation
- Choice of fan speeds: Quiet, Low, Medium, High, and Super High; Auto fan speed control also included
- Wireless remote controller is included; PAR-21MAA wired remote controller can be installed as an option
- Indoor unit powered from outdoor unit using A-Control
- Auto restart following a power outage
- Limited warranty: five years on parts and defects and seven years on compressors

OPTIONAL ACCESSORIES
Indoor Unit

- ☐ Condensate Pump (230V; SI3100-230)
- ☐ Anti-allergy Enzyme Filter (Two pieces per set; MAC-408FT-E)

Controller Options

- ☐ Wall-mounted Wired Remote Controller (PAR-21MAA requires MAC-397IF)
- ☐ MA Contact Terminal Interface (MAC-397IF)
- ☐ M-NET Control Adapter (MAC-399IF)
- ☐ Remote Temperature Sensor (M21-JKO-307)
- ☐ Lockdown Bracket for Handheld Controller (RCMKP1CB)

Cooling Capacity* 12,000 Btu/h

Heating Capacity* 14,400 Btu/h

* Rating Conditions (Cooling) - Indoor: 80°F (27°C) DB, 67°F (19°C) WB; Outdoor: 95°F (35°C) DB, 75°F (24°C) WB.
(Heating at 47°F) - Indoor: 70°F (21°C) DB, 60°F (16°C) WB; Outdoor: 47°F (8°C) DB, 43°F (6°C) WB.
(For data on specific indoor units [all ducted, all non-ducted, and both ducted and non-ducted] combinations, see the MXZ-B Technical and Service Manual.)

Electrical Requirements

Power Supply 208 / 230V, 1-Phase, 60 Hz
MCA 1 A

Voltage

Indoor - Outdoor S1-S2 AC 208 / 230V
Indoor - Outdoor S2-S3 DC 12-24V

Fan Motor 0.76 F.L.A.



Indoor Unit: MSZ-GE12NA



Wireless Remote Controller

Airflow (Quiet - Lo - Med - Hi - Super Hi)

Cooling	145 - 170 - 237 - 321 - 399 Dry CFM
Heating	109 - 134 - 201 - 286 - 364 Wet CFM
	145 - 170 - 237 - 321 - 406 CFM

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)

Cooling	19 - 22 - 30 - 37 - 45 dB(A)
Heating	19 - 22 - 30 - 37 - 43 dB(A)

DIMENSIONS	UNIT INCHES / MM
W	31-7/16 / 799
D	9-1/8 / 232
H	11-5/8 / 295

Weight 22 lbs. / 10 kg
External Finish Munsell No. 1.0Y 9.2 / 0.2
Field Drainpipe Size O.D. 5/8" / 15.88 mm

Refrigerant Type R410A
Refrigerant Pipe Size O.D.
Gas Side 3/8" / 9.52 mm
Liquid Side 1/4" / 6.35 mm
Connection Method Flared

MXZ-B SERIES HEAT-PUMP OUTDOOR UNITS


Outdoor Unit: MXZ-4B36NA

MXZ-B MULTI-ZONE SYSTEMS CAN INCLUDE:

- Ducted Indoor Units:
SEZ-KD09,12,15,18NA, PEAD-A24AA
 - Nonducted Indoor Units:
MSZ-GE06,09,12,15,18,24NA,
MSZ-FE09,12,18NA, MFZ-KA09,12,18NA,
PCA-A24KA, SLZ-KA09,12,15NA, and
PLA-A12,18,24BA
 - A combination of both Ducted and Nonducted Indoor Units
- Refer to the separate submittal forms for the MSZ-GE, MSZ-FE, MFZ-KA, SEZ-KD, SLZ-KA, PEAD, PCA, PLA Indoor Units, and MXZ Outdoor Units.



MSZ-GE



SEZ-KD and PEAD-A24



MSZ-FE



MFZ-KA



PCA-KA




SLZ-KA and PLA-ABA



DIMENSIONS: MSZ-GE12NA

Unit: inch

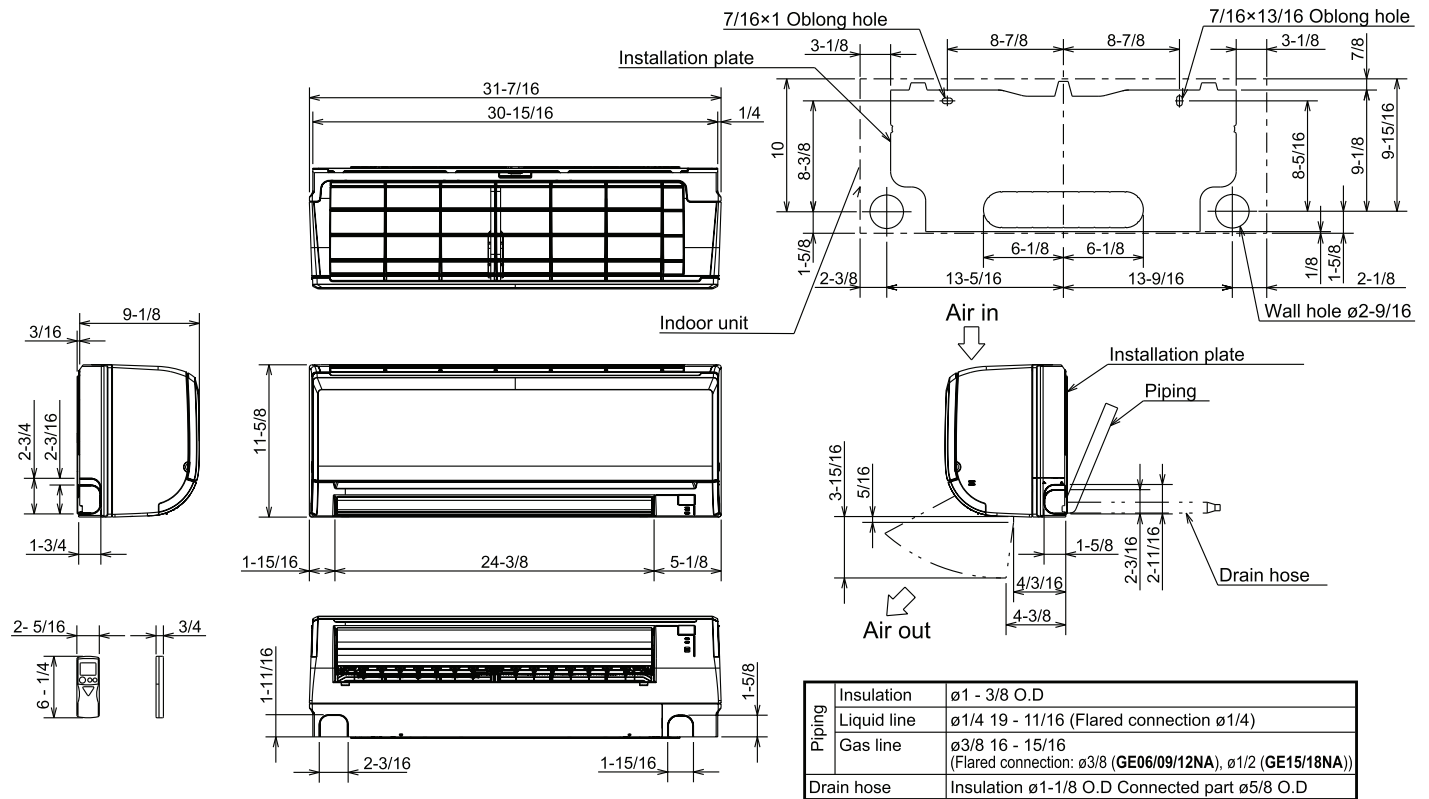

HVAC Advanced Products Division
 3400 Lawrenceville Suwanee Rd
 Suwanee, GA 30024
 Tele: 678-376-2900 • Fax: 800-889-9904
 Toll Free: 800-433-4822 (#3)
www.mehvac.com
 Specifications are subject to change without notice.



SUBMITTAL DATA: MSZ-GE15NA. . . . 15,000 BTU/H WALL-MOUNTED INDOOR UNIT FOR MXZ-B MULTI-ZONE HEAT-PUMP SYSTEMS

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For ☐ Reference ☐ Approval ☐ Construction	
System Designation:	Schedule No.:	

GENERAL FEATURES

- Wall-mounted indoor unit
- Standard Hybrid Catechin Prefilter is included with indoor unit
- Quiet operation
- Choice of fan speeds: Quiet, Low, Medium, High, and Super High; Auto fan speed control also included
- Wireless remote controller is included; PAR-21MAA wired remote controller can be installed as an option
- Indoor unit powered from outdoor unit using A-Control
- Auto restart following a power outage
- Limited warranty: five years on parts and defects and seven years on compressors

OPTIONAL ACCESSORIES
Indoor Unit

- ☐ Condensate Pump (230V; SI3100-230)
- ☐ Anti-allergy Enzyme Filter (Two pieces per set; MAC-408FT-E)

Controller Options

- ☐ Wall-mounted Wired Remote Controller (PAR-21MAA requires MAC-397IF)
- ☐ MA Contact Terminal Interface (MAC-397IF)
- ☐ M-NET Control Adapter (MAC-399IF)
- ☐ Remote Temperature Sensor (M21-JKO-307)
- ☐ Lockdown Bracket for Handheld Controller (RCMKP1CB)

Cooling Capacity* 14,000 Btu/h

Heating Capacity* 18,000 Btu/h

* Rating Conditions (Cooling) - Indoor: 80°F (27°C) DB, 67°F (19°C) WB; Outdoor: 95°F (35°C) DB, 75°F (24°C) WB.

(Heating at 47°F) - Indoor: 70°F (21°C) DB, 60°F (16°C) WB; Outdoor: 47°F (8°C) DB, 43°F (6°C) WB.

(For data on specific indoor units [all ducted, all non-ducted, and both ducted and non-ducted] combinations, see the MXZ-B Technical and Service Manual.)

Electrical Requirements

Power Supply 208 / 230V, 1-Phase, 60 Hz
MCA 1 A

Voltage

Indoor - Outdoor S1-S2 AC 208 / 230V
Indoor - Outdoor S2-S3 DC 12-24V

Fan Motor 0.76 F.L.A.



Indoor Unit: MSZ-GE15NA



Wireless Remote Controller

Airflow (Quiet - Lo - Med - Hi - Super Hi)

Cooling 205 - 272 - 335 - 420 - 533 Dry CFM

170 - 237 - 300 - 385 - 498 Wet CFM

Heating 205 - 247 - 304 - 367 - 463 CFM

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)

Cooling 26 - 32 - 38 - 44 - 49 dB(A)

Heating 26 - 30 - 35 - 40 - 46 dB(A)

DIMENSIONS	UNIT INCHES / MM
W	31-7/16 / 799
D	9-1/8 / 232
H	11-5/8 / 295

Weight 22 lbs. / 10 kg

External Finish Munsell No. 1.0Y 9.2 / 0.2

Field Drainpipe Size O.D. 5/8" / 15.88 mm

Refrigerant Type R410A

Refrigerant Pipe Size O.D.

Gas Side 1/2" / 12.7 mm

Liquid Side 1/4" / 6.35 mm

Connection Method Flared

MXZ-B SERIES HEAT-PUMP OUTDOOR UNITS


Outdoor Unit: MXZ-4B36NA

MXZ-B MULTI-ZONE SYSTEMS CAN INCLUDE:

- Ducted Indoor Units:
SEZ-KD09,12,15,18NA, PEAD-A24AA

- Nonducted Indoor Units:
**MSZ-GE06,09,12,15,18,24NA,
MSZ-FE09,12,18NA, MFZ-KA09,12,18NA,
PCA-A24KA, SLZ-KA09,12,15NA, and
PLA-A12,18,24BA**

- A combination of both Ducted and Nonducted Indoor Units

Refer to the separate submittal forms for the MSZ-GE, MSZ-FE, MFZ-KA, SEZ-KD, SLZ-KA, PEAD, PCA, PLA Indoor Units, and MXZ Outdoor Units.



MSZ-GE



SEZ-KD and PEAD-A24



MSZ-FE



MFZ-KA




PCA-KA



SLZ-KA and PLA-ABA

DIMENSIONS: MSZ-GE15NA

Unit: inch

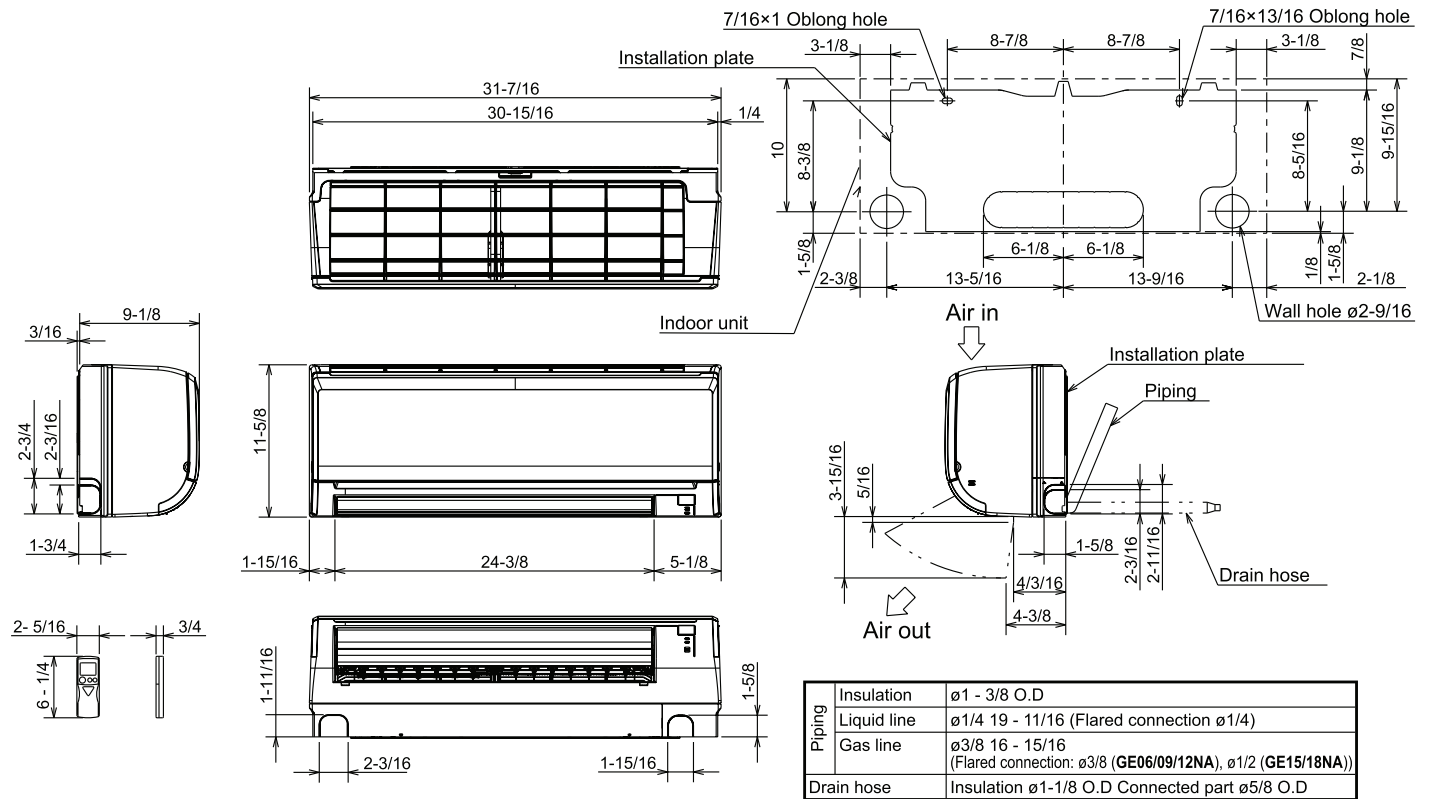

HVAC Advanced Products Division
3400 Lawrenceville Suwanee Rd
Suwanee, GA 30024
Tele: 678-376-2900 • Fax: 800-889-9904
Toll Free: 800-433-4822 (#3)
www.mehvac.com
Specifications are subject to change without notice.

SUBMITTAL DATA: MSZ-GE18NA..... 18,000 BTU/H WALL-MOUNTED INDOOR UNIT FOR MXZ-B MULTI-ZONE HEAT-PUMP SYSTEMS

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For ☐ Reference ☐ Approval ☐ Construction	
System Designation:	Schedule No.:	

GENERAL FEATURES

- Wall-mounted indoor unit
- Standard Hybrid Catechin Prefilter is included with indoor unit
- Quiet operation
- Choice of fan speeds: Quiet, Low, Medium, High, and Super High
- Auto fan speed control also included
- Hand-held Wireless Remote Controller
- Indoor unit powered from outdoor unit using A-Control
- Auto restart following a power outage
- Anti-allergy Enzyme Filter
- Limited warranty: five years on parts and defects and seven years on compressors

OPTIONAL ACCESSORIES
Indoor Unit

- ☐ Condensate Pump (230V; SI3100-230)

Controller Options

- ☐ Wall-mounted Wired Remote Controller (PAR-21MAA requires MAC-397IF)
- ☐ MA Contact Terminal Interface (MAC-397IF)
- ☐ M-NET Control Adapter (MAC-399IF)
- ☐ Remote Temperature Sensor (M21-JKO-307)
- ☐ Lockdown Bracket for Hand-held Controller (RCMKP1CB)

Cooling Capacity*.....17,200 Btu/h

Heating Capacity*.....21,600 Btu/h

* Rating Conditions (Cooling) - Indoor: 80°F (27°C) DB, 67°F (19°C) WB; Outdoor: 95°F (35°C) DB, 75°F (24°C) WB.

(Heating at 47°F) - Indoor: 70°F (21°C) DB, 60°F (16°C) WB; Outdoor: 47°F (8°C) DB, 43°F (6°C) WB.

(For data on specific indoor units [all ducted, all non-ducted, and both ducted and non-ducted] combinations, see the MXZ-B Technical and Service Manual.)

Electrical Requirements

Power Supply.....208 / 230V, 1-Phase, 60 Hz

MCA.....1 A

Voltage

Indoor - Outdoor S1-S2.....AC 208 / 230V

Indoor - Outdoor S2-S3.....DC 12-24V

Fan Motor.....0.76 F.L.A.



Indoor Unit: MSZ-GE18NA

Airflow (Quiet - Lo - Med - Hi - Super Hi)

Cooling.....230 - 275 - 339 - 420 - 533 Dry CFM

194 - 240 - 304 - 385 - 498 Wet CFM

Heating.....230 - 275 - 339 - 431 - 512 CFM

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)

Cooling.....28 - 33 - 38 - 44 - 49 dB(A)

Heating.....28 - 33 - 38 - 43 - 49 dB(A)

DIMENSIONS	UNIT INCHES / MM
W	31-7/16 / 799
D	9-1/8 / 232
H	11-5/8 / 295

Weight.....22 lbs. / 10 kg

External Finish.....Munsell No. 1.0Y 9.2 / 0.2

Field Drainpipe Size O.D.....5/8" / 15.88 mm

Refrigerant Type.....R410A

Refrigerant Pipe Size O.D.

Gas Side.....1/2" / 12.7 mm

Liquid Side.....1/4" / 6.35 mm

Connection Method.....Flared

MXZ-B SERIES HEAT-PUMP OUTDOOR UNITS
MXZ-B MULTI-ZONE SYSTEMS CAN INCLUDE:


- Ducted Indoor Units:
SEZ-KD09,12,15,18NA, PEAD-A24AA
 - Nonducted Indoor Units:
**MSZ-GE06,09,12,15,18,24NA,
MSZ-FE09,12,18NA, MFZ-KA09,12,18NA,
PCA-A24KA, SLZ-KA09,12,15NA, and
PLA-A12,18,24BA**
 - A combination of both Ducted and Nonducted Indoor Units
- Refer to the separate submittal forms for the MSZ-GE, MSZ-FE, MFZ-KA, SEZ-KD, SLZ-KA, PEAD, PCA, PLA Indoor Units, and MXZ Outdoor Units.



MULTI-ZONE OUTDOOR UNIT



MSZ-GE



SEZ and PEAD-A24AA



MSZ-FE



MFZ-KA



PCA-KA




SLZ and PLA-A12,18,24BA



DIMENSIONS: MSZ-GE18NA

Unit: inch

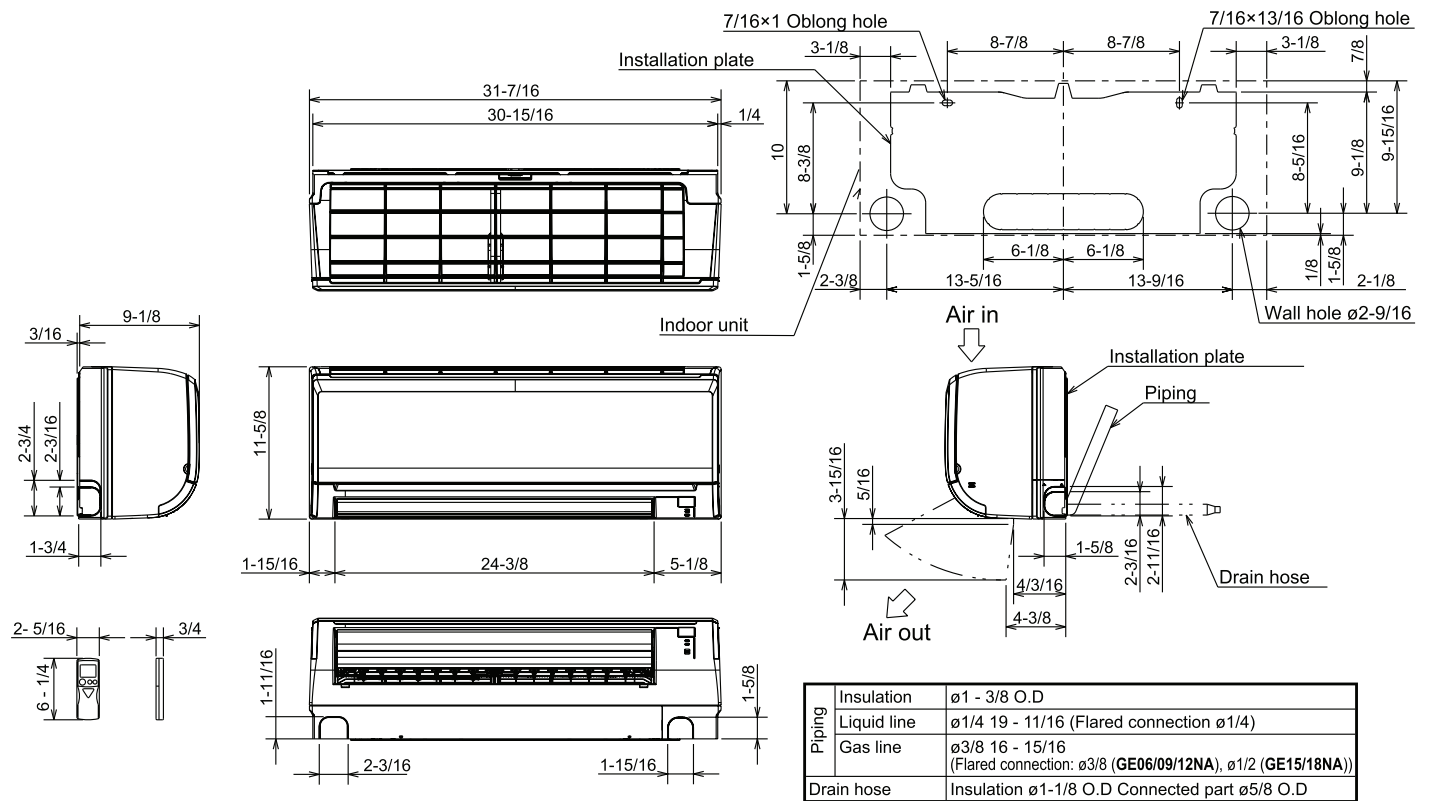

Intertek




3400 Lawrenceville Suwanee Rd
Suwanee, GA 30024
Tele: 678-376-2900 • Fax: 800-889-9904
Toll Free: 800-433-4822 (#3)
www.mehvac.com

Specifications are subject to change without notice.

DIMENSIONS: MSZ-GE24NA & MUZ-GE24NA


MSZ-GE24NA

Unit: inch

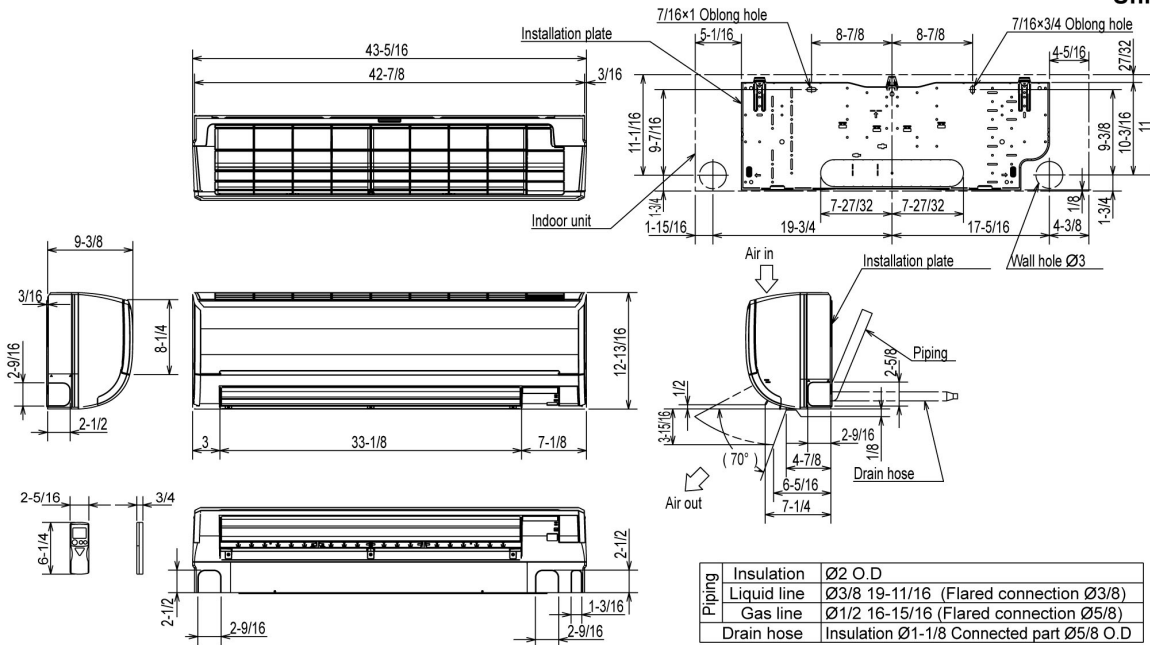

MUZ-GE24NA

Unit: inch

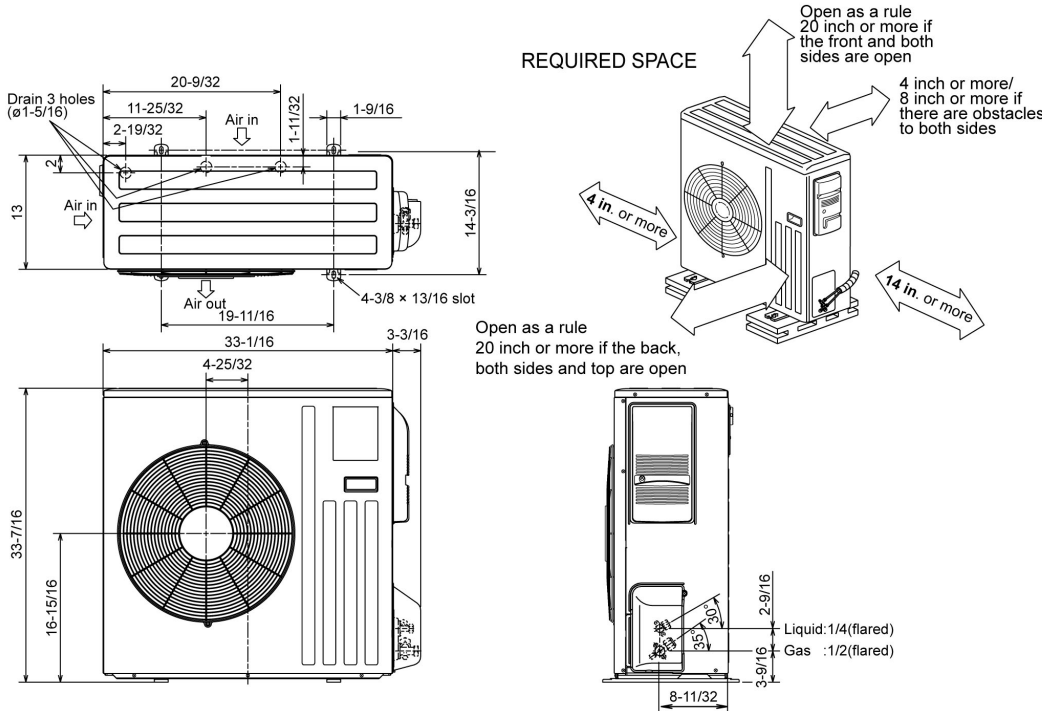

COOLING & HEATING

1340 Satellite Boulevard, Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com