

SUBMITTAL DATA: MSZ-GE09NA-8 & MUZ-GE09NA

9,000 BTU/H WALL-MOUNTED HEAT-PUMP SYSTEMS

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For ☐ Reference ☐ Approval ☐ Construction	
System Designation:	Schedule No.:	



Indoor Unit: MSZ-GE09NA-8


Wireless Remote
Controller


Outdoor Unit: MUZ-GE09NA

GENERAL FEATURES

- Wall-mounted indoor unit
- Standard Hybrid Catechin Prefilter is included with indoor unit
- Quiet operation
- Auto fan speed control: Quiet, Low, Medium, High, and Super High
- Hand-held Wireless Remote Controller
- Indoor unit powered from outdoor unit using A-Control
- Auto restart following a power outage
- Base heater is available as an option
- Anti-allergy Enzyme Filter
- Limited warranty: five years parts and seven years compressor

ACCESSORIES

Outdoor Unit

- ☐ Base Heater (MAC-640BH-U)
- ☐ Drain Socket Assembly (MAC-860DS)

Indoor Unit

- ☐ Condensate Pump (230V; SI3100-230)

Controller Options

- ☐ Wireless Wall-mounted Remote Controller Kit (MHK1)*
- ☐ Portable Central Controller (MCCH1)*
- ☐ Outdoor Air Sensor (MOS1)*

*See Submittal for information on each option.

- ☐ Wired Wall-mounted Controller (PAR-31MAA requires MAC-333IF)
- ☐ System Control Interface (MAC-333IF)



SPECIFICATIONS: MSZ-GE09NA-8 & MUZ-GE09NA

Cooling*

Rated Capacity 9,000 Btu/h
Minimum Capacity 3,800 Btu/h
SEER 21.0 Btu/h/W
Total Input 660 W

Heating at 47°F*

Rated Capacity 10,900 Btu/h
Minimum Capacity** 4,500 Btu/h
HSPF 10.0 Btu/h/W
Total Input 760 W

Heating at 17°F*

Rated Capacity 6,600 Btu/h
Rated Total Input 700 W
Maximum Capacity** 8,700 Btu/h
Maximum Total Input 950 W

* Rating Conditions per AHRI Standard

Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB
Cooling | Outdoor: 95° F (35° C) DB / 75° F (24° C) WB
Heating at 47°F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB
Heating at 47°F | Outdoor: 47° F (8° C) DB / 43° F (6° C) WB
Heating at 17° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB
Heating at 17° F | Outdoor: 17° F (-8° C) DB / 15° F (-9° C) WB

**** Maximum Capacity is at full speed and performance for INVERTER-driven System.**

Electrical Requirements

Power Supply 208 / 230V, 1-Phase, 60 Hz
Breaker Size 15 A

OPERATING RANGE

		Indoor Intake Air Temp.	Outdoor Intake Air Temp.
Cooling	Maximum	90° F (32° C) DB, 73° F (23° C) WB	115° F (46° C) DB
	Minimum	67° F (19° C) DB, 57° F (14° C) WB	14° F (-10° C) DB
Heating	Maximum	80° F (27° C) DB, 67° F (19° C) WB	75° F (24° C) DB, 65° F (18° C) WB
	Minimum	70° F (21° C) DB, 60° F (16° C) WB	-4° F (-20° C) DB, -5° F (-21° C) WB

Voltage

Indoor - Outdoor S1-S2 AC 208 / 230V
Indoor - Outdoor S2-S3 DC ±24V
Indoor - Remote Controller MKH1 DC 3V
PAR-31MAA DC 12V

Indoor Unit

MCA 1 A
Blower Motor (ECM) 0.76 F.L.A.
Airflow (Quiet - Low - Medium - High - Super High)
Cooling 145 - 170 - 237 - 321 - 399 Dry CFM
109 - 134 - 201 - 286 - 364 Wet CFM
Heating 145 - 170 - 237 - 321 - 406 Dry CFM

Sound Pressure Level (Quiet - Low - Medium - High - Super High)
Cooling 19 - 22 - 30 - 37 - 43 dB(A)
Heating 19 - 22 - 30 - 37 - 43 dB(A)

DIMENSIONS	UNIT INCHES / MM
W	31-7/16 / 799
D	9-1/8 / 232
H	11-5/8 / 295

Weight 22 lbs. / 10 kg
External Finish Munsell No. 1.0Y 9.2 / 0.2
Field Drainpipe Size O.D. 5/8" / 15.88 mm

Outdoor Unit

Compressor DC Inverter-driven
MCA 12 A
Fan Motor (ECM) 0.50 F.L.A.
Sound Pressure Level
Cooling 46 dB(A)
Heating 50 dB(A)

DIMENSIONS	INCHES / MM
W	31-1/2 / 800
D	11-1/4 / 286
H	21-5/8 / 549

Weight 66 lbs. / 30 kg
External Finish Munsell No. 3Y 7.8 / 1.1


Refrigerant Type R410A
Refrigerant Pipe Size O.D.
Gas Side 3/8" / 9.52 mm
Liquid Side 1/4" / 6.35 mm
Max. Refrigerant Pipe Length 65 ft. / 20 m
Max. Refrigerant Pipe Height Difference 40 ft. / 12 m
Connection Method Flared

Notes:

DIMENSIONS: MSZ-GE09NA-8 & MUZ-GE09NA


MSZ-GE09NA-8

Unit: inch

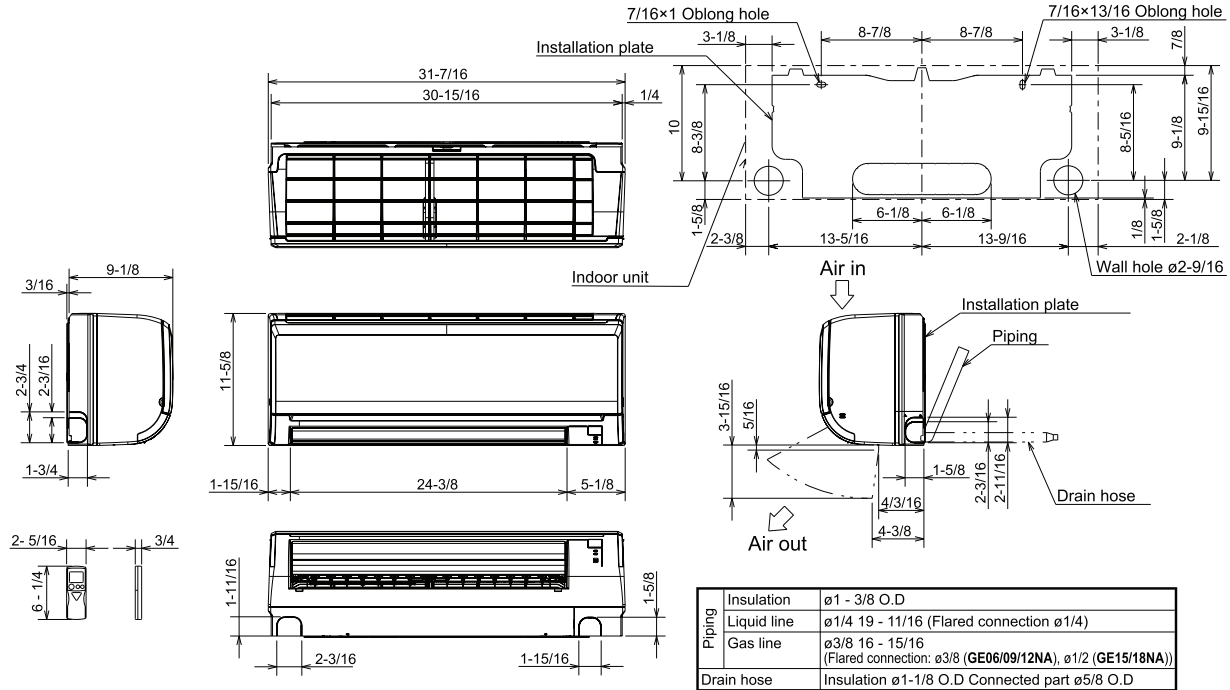


MUZ-GE09NA

Unit: inch

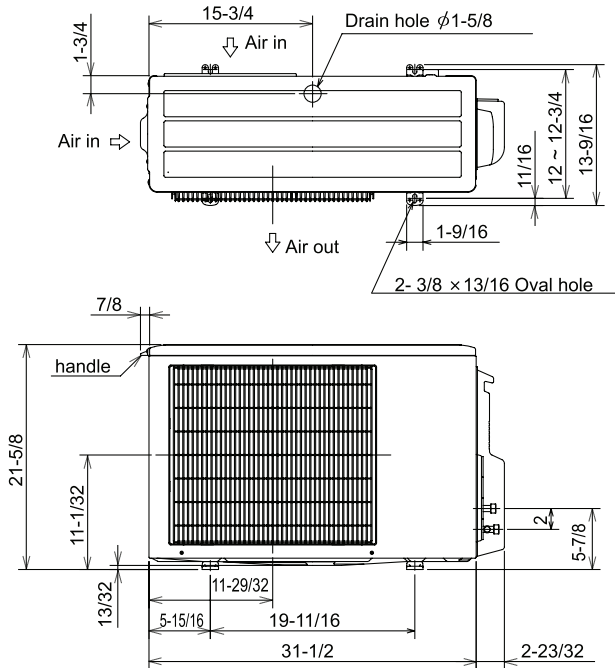

REQUIRED SPACE

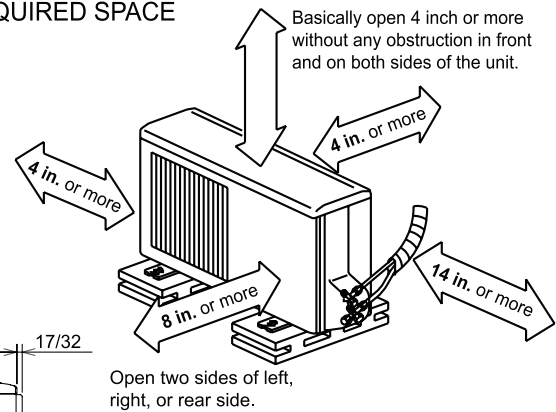

Liquid pipe : 1/4 (flared)
Gas pipe : 3/8 (flared) (GE09/12)
1/2 (flared) (GE15)



Intertek




1340 Satellite Boulevard
Suwanee, GA 30024
Tele: 678-376-2900 • Fax: 800-889-9904
Toll Free: 800-433-4822
www.mehvac.com

DIMENSIONS: MSZ-GE12NA-8 & MUZ-GE12NA


MSZ-GE12NA-8

Unit: inch


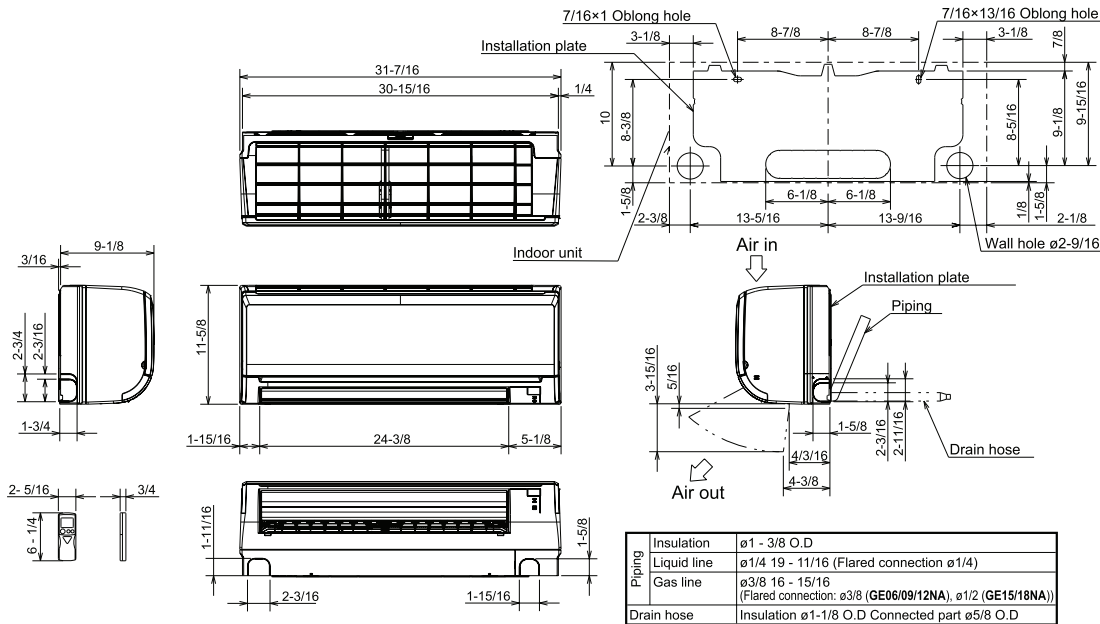


MUZ-GE12NA

Unit: inch

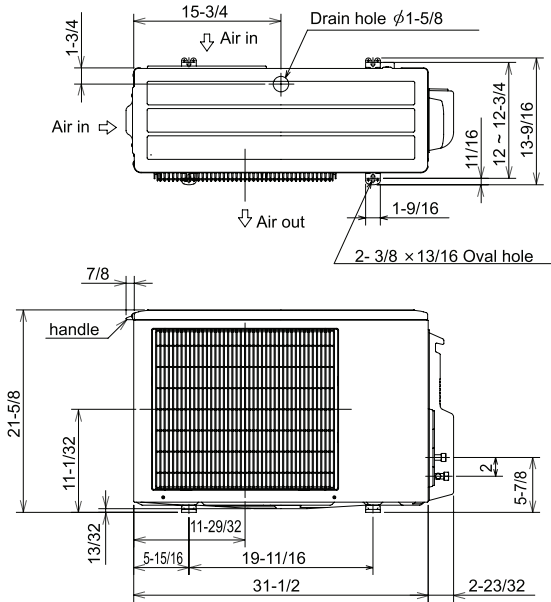

REQUIRED SPACE

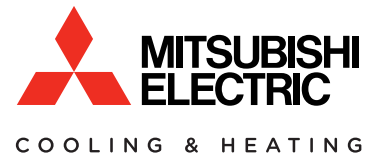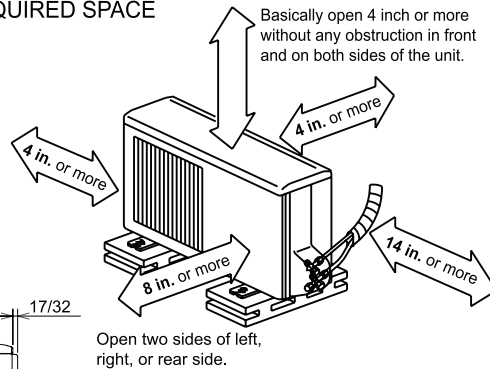

1340 Satellite Boulevard. Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com



Job Name:

System Reference:

Date:



Indoor Unit: MSZ-GE15NA-8



Outdoor Unit: MUZ-GE15NA-1

Wireless Remote
Controller**GENERAL FEATURES**

- Wall-mounted indoor unit
- Standard Hybrid Catechin Prefilter is included with indoor unit
- Quiet operation
- Auto fan speed control: Quiet, Low, Medium, High, and Super High
- Hand-held Wireless Remote Controller
- Indoor unit powered from outdoor unit using A-Control
- Auto restart following a power outage
- Anti-allergy Enzyme Filter
- Limited warranty: five years parts and seven years compressor

ACCESSORIES**Indoor Unit**

- Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- Condensate Pump (Sauermaann SI30-115/230; 115/230V)
- Anti-Allergy Enzyme Filter (MAC-408FT-E)
- Drain Pan Level Sensor (DPLS2)

Outdoor Unit

- Three-pole Disconnect Switch (TAZ-MS303)
- Air Outlet Guide (MAC-889SG)
- Mounting Base (DSD-400N)
- Mounting Pad (ULTRILITE1)
- Wall Mounting Bracket (QSWB2000M-1)

Controller Options

- Wireless Controller (MHK1)
- Wired Remote Controller PAR-31MAA (Requires MAC-333IF-E)
- Wireless Interface for kumo cloud™ (PAC-WHS01WF-E)
- Thermostat Interface (PAC-US444CN-1)

SPECIFICATIONS**Cooling¹**

Rated Capacity 14,000 Btu/h
 Minimum Capacity 3,100 Btu/h
 SEER 21.0 Btu/h/W
 Total Input 1,080 W

Heating at 47° F²

Rated Capacity 18,000 Btu/h
 Minimum Capacity 4,800 Btu/h
 HSPF 10.0 Btu/h/W
 Total Input 1,600 W

Heating at 17° F³

Rated Capacity 11,300 Btu/h
 Rated Total Input 1,150 W
 Maximum Capacity** 15,900 Btu/h
 Maximum Total Input 1,950 W

¹ Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB⁴¹ Cooling | Outdoor: 95° F (35° C) DB / 75° F (24° C) WB⁴² Heating at 47° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB⁴² Heating at 47° F | Outdoor: 47° F (8° C) DB / 43° F (6° C) WB⁴³ Heating at 17° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB⁴³ Heating at 17° F | Outdoor: 17° F (-8° C) DB / 15° F (-9° C) WB⁴⁴ Rating Conditions per AHRI Standard⁵ ** Maximum Capacity is at full speed and performance for INVERTER-driven System.

ENERGY STAR® Yes
 ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.

Electrical Requirements

Power Supply 208 / 230V, 1-Phase, 60 Hz
 Breaker Size 15 A

Voltage

Indoor - Outdoor S1-S2 AC 208 / 230V
 Indoor - Outdoor S2-S3 DC ±24V
 Indoor - Remote Controller MHK1 DC 3V
 PAR-31MAA DC 12V
 PAC-YT53CRAU DC 12V

OPERATING RANGE

		Indoor Intake Air Temp.	Outdoor Intake Air Temp.
Cooling ⁴	Maximum	90° F (32° C) DB 73° F (23° C) WB	115° F (46° C) DB
	Minimum	67° F (19° C) DB 57° F (14° C) WB	14° F (-10° C) DB
Heating	Maximum	80° F (27° C) DB 67° F (19° C) WB	75° F (24° C) DB 65° F (18° C) WB
	Minimum	70° F (21° C) DB 60° F (16° C) WB	-4° F (-20° C) DB ⁵ -5° F (-21° C) WB

⁴ Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

⁵ System cuts out at -9° F (-27° C) to avoid thermistor error and automatically restarts at -4° F (-20° C).

Indoor Unit

MCA 1 A
 Blower Motor (ECM) 0.76 F.L.A.
 Airflow (Quiet - Lo - Med - Hi - Super Hi)
 Cooling 205 - 272 - 335 - 420 - 533 Dry CFM
 170 - 237 - 300 - 385 - 498 Wet CFM
 Heating 205 - 247 - 304 - 367 - 463 Dry CFM

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)

Cooling 26 - 32 - 38 - 44 - 49 dB(A)
 Heating 26 - 30 - 35 - 40 - 46 dB(A)

DIMENSIONS	UNIT INCHES / MM
W	31-7/16 / 799
D	9-1/8 / 232
H	11-5/8 / 295

Weight 22 lbs. / 10 kg
 External Finish Munsell No. 1.0Y 9.2 / 0.2
 Field Drainpipe Size O.D. 5/8" / 15.88 mm

Outdoor Unit

Compressor DC Inverter-driven Twin Rotary
 MCA 12 A
 Fan Motor (ECM) 0.50 F.L.A.
 Sound Pressure Level
 Cooling 49 dB(A)
 Heating 51 dB(A)

DIMENSIONS	INCHES / MM
W	31-1/2 / 800
D	11-1/4 / 286
H	21-5/8 / 549


Weight 80 lbs. / 37 kg
 External Finish Munsell No. 3Y 7.8 / 1.1

Refrigerant Type R410A
 Refrigerant Pipe Size O.D.
 Gas Side 1/2" / 12.7 mm
 Liquid Side 1/4" / 6.35 mm
 Max. Refrigerant Pipe Length 65 ft. / 20 m
 Max. Refrigerant Pipe Height Difference 40 ft. / 12 m
 Connection Method Flared

DIMENSIONS: MSZ-GE15NA-8 & MUZ-GE15NA-1


MSZ-GE15NA-8

Unit: inch

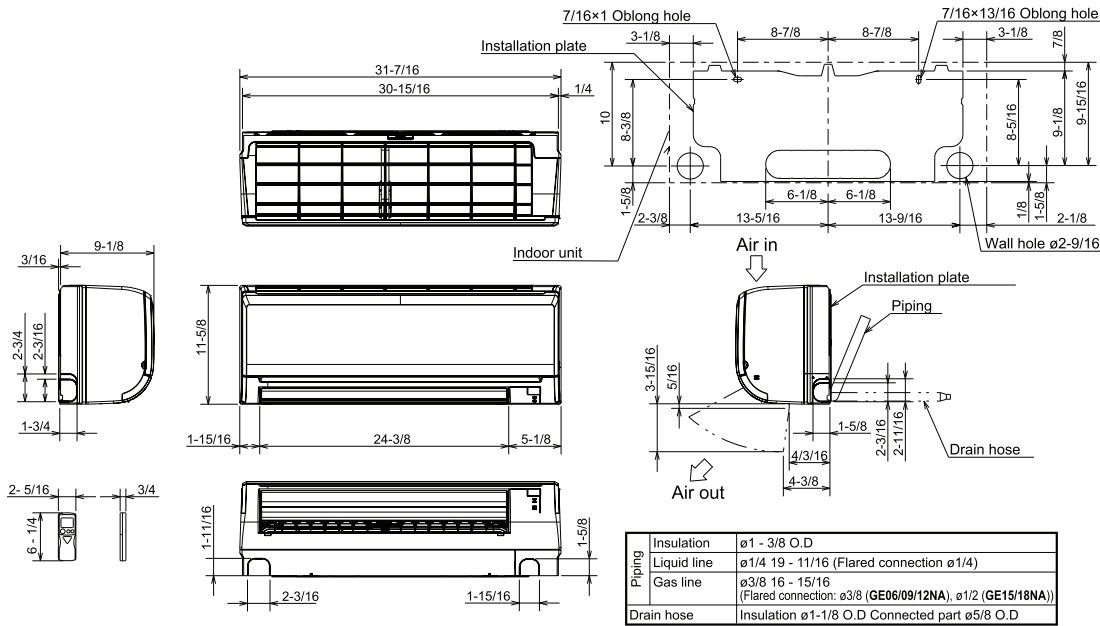


MUZ-GE15NA-1

Unit: inch

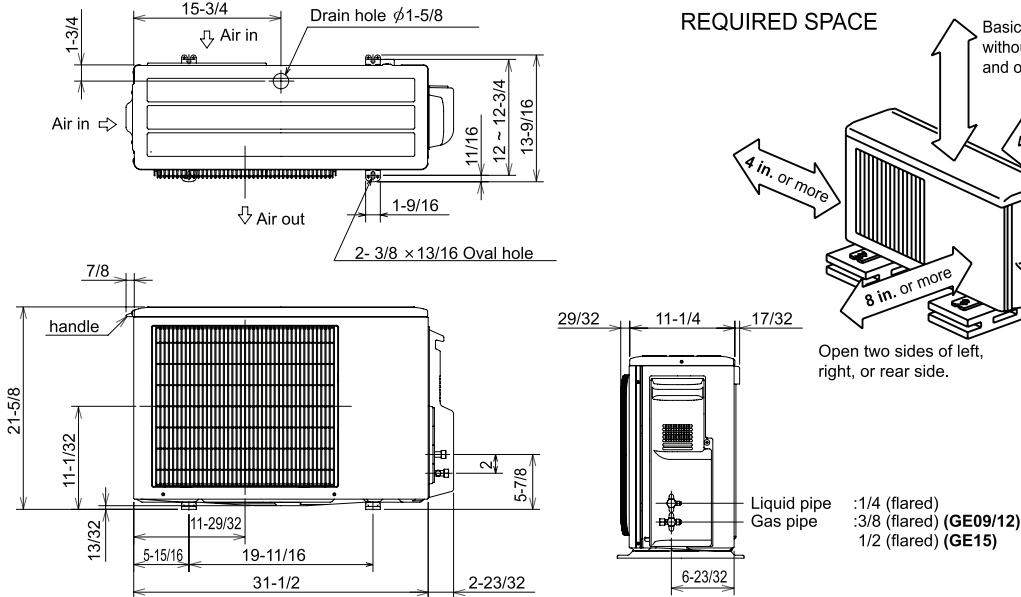

REQUIRED SPACE

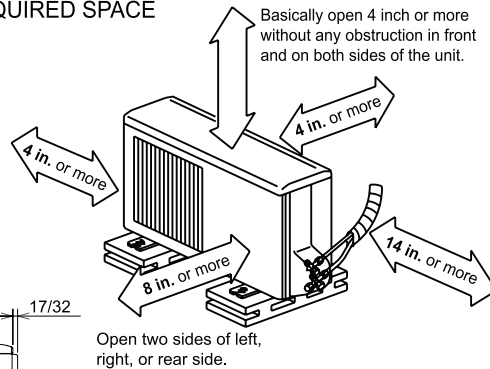

MITSUBISHI ELECTRIC
COOLING & HEATING

1340 Satellite Boulevard, Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

SUBMITTAL DATA: MSZ-GE18NA & MUZ-GE18NA.....18,000 BTU/H WALL-MOUNTED HEAT-PUMP SYSTEMS

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For ☐ Reference ☐ Approval ☐ Construction	
System Designation:	Schedule No.:	

GENERAL FEATURES

- Wall-mounted indoor unit
- Standard Hybrid Catechin Prefilter is included with indoor unit
- Quiet operation
- Choice of fan speeds: Quiet, Low, Medium, High, and Super High
- Auto fan speed control also included
- Hand-held Wireless Remote Controller
- Indoor unit powered from outdoor unit using A-Control
- Auto restart following a power outage
- Base heater is available as an option
- Anti-allergy Enzyme Filter
- Limited warranty: five years on parts and defects and seven years on the compressor

OPTIONAL ACCESSORIES
Outdoor Unit

- ☐ Base Heater (MAC-641BH-U)
- ☐ Drain Socket Assembly (MAC-811DS)

Indoor Unit

- ☐ Condensate Pump (230V; SI3100-230)
- ☐ (Two pieces per set; MAC-408FT-E)

Controller Options

- ☐ Wall-mounted Wired Remote Controller (PAR-21MAA; req. MAC-3971F)
- ☐ MA Contact Terminal Interface (MAC-397IF)
- ☐ M-NET Control Adapter (MAC-399IF)
- ☐ Remote Temperature Sensor (M21-JKO-307)
- ☐ Lockdown Bracket for Hand-held Controller (RCMKP1CB)

Cooling*

Rated Capacity.....17,200 Btu/h
Minimum Capacity.....3,700 Btu/h
SEER.....19.2 Btu/h/W
Total Input.....1,640 W

Heating at 47°F*

Rated Capacity.....21,600 Btu/h
Minimum Capacity.....3,500 Btu/h
HSPF.....10.0 Btu/h/W
Total Input.....1,900 W

Heating at 17°F*

Rated Capacity.....13,400 Btu/h
Rated Total Input.....1,450 W
Maximum Capacity.....17,200 Btu/h
Maximum Total Input.....2,080 W

* Rating Conditions (Cooling) - Indoor: 80°F (27°C) DB, 67°F (19°C) WB; Outdoor: 95°F (35°C) DB, 75°F (24°C) WB.
(Heating at 47°F) - Indoor: 70°F (21°C) DB, 60°F (16°C) WB; Outdoor: 47°F (8°C) DB, 43°F (6°C) WB.
(Heating at 17°F) - Indoor: 70°F (21°C) DB, 60°F (16°C) WB; Outdoor: 17°F (-8°C) DB, 15°F (-9°C) WB.

Electrical Requirements

Power Supply.....208 / 230V, 1-Phase, 60 Hz
Breaker Size.....15 A

Voltage

Indoor - Outdoor S1-S2.....AC 208 / 230V
Indoor - Outdoor S2-S3.....DC 12-24V
Indoor - Remote Controller.....Wireless



Indoor Unit: MSZ-GE18NA


Wireless Remote
Controller


Outdoor Unit: MUZ-GE18NA

OPERATING RANGE

		Indoor Intake Air Temp.	Outdoor Intake Air Temp.
Cooling	Maximum	90°F (32°C) DB, 73°F (23°C) WB	115°F (46°C) DB
	Minimum	67°F (19°C) DB, 57°F (14°C) WB	14°F (-10°C) DB
Heating	Maximum	80°F (27°C) DB, 67°F (19°C) WB	75°F (24°C) DB, 65°F (18°C) WB
	Minimum	70°F (21°C) DB, 60°F (16°C) WB	-4°F (-20°C) DB, -5°F (-21°C) WB

Indoor Unit

MCA.....1 A
Fan Motor.....0.76 F.L.A.
Airflow (Quiet - Lo - Med - Hi - Super Hi)
Cooling.....230 - 275 - 339 - 420 - 533 Dry CFM
194 - 240 - 304 - 385 - 498 Wet CFM
Heating.....230 - 275 - 339 - 431 - 512 Dry CFM

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)

Cooling.....28 - 33 - 38 - 44 - 49 dB(A)
Heating.....28 - 33 - 38 - 43 - 49 dB(A)

DIMENSIONS	UNIT INCHES / MM
W	31-7/16 / 799
D	9-1/8 / 232
H	11-5/8 / 295

Weight.....22 lbs. / 10 kg
External Finish.....Munsell No. 1.0Y 9.2 / 0.2
Field Drainpipe Size O.D.....5/8" / 15.88 mm

Outdoor Unit

Compressor.....DC Inverter-driven Twin Rotary
MCA.....14 A
Fan Motor.....0.93 F.L.A.
Sound Pressure Level
Cooling.....54 dB(A)
Heating.....56 dB(A)

DIMENSIONS	INCHES / MM
W	33-1/16 / 840
D	13 / 330
H	33-7/16 / 849


Weight.....119 lbs. / 54 kg
External Finish.....Munsell No. 3Y 7.8 / 1.1
Refrigerant Type.....R410A
Refrigerant Pipe Size O.D.
Gas Side.....1/2" / 12.7 mm
Liquid Side.....1/4" / 6.35 mm
Max. Refrigerant Pipe Length.....100 ft. / 30 m
Max. Refrigerant Pipe Height Difference.....50 ft. / 15 m
Connection Method.....Flared




DIMENSIONS: MSZ-GE18NA & MUZ-GE18NA

MSZ-GE18NA



Unit: inch

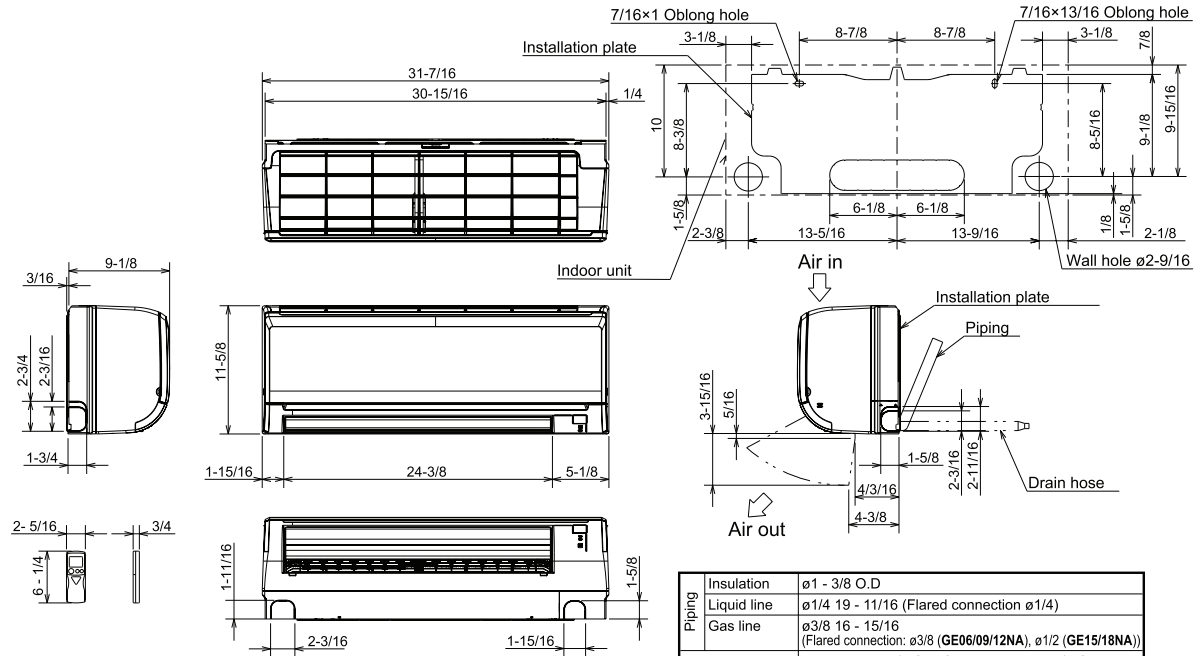

MUZ-GE18NA

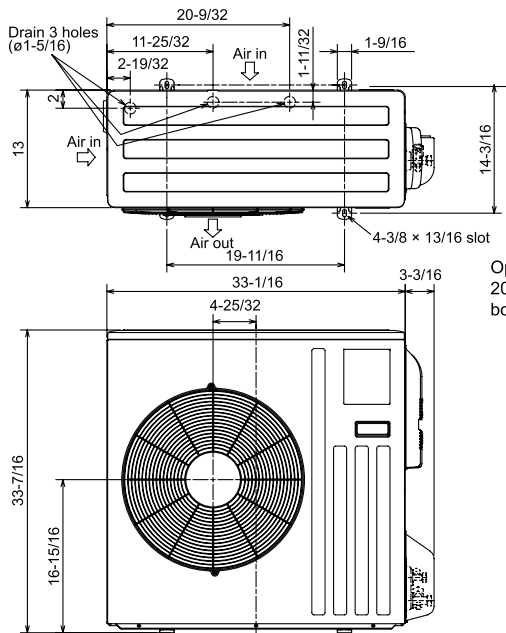

REQUIRED SPACE

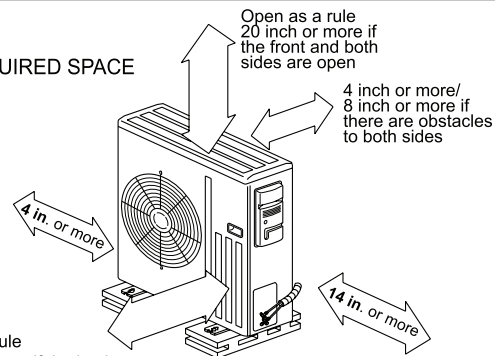

Intertek



3400 Lawrenceville Suwanee Rd
Suwanee, GA 30024
Tele: 678-376-2900 • Fax: 800-889-9904
Toll Free: 800-433-4822 (#3)
www.mehvac.com
Specifications are subject to change without notice.

Job Name:

System Reference:

Date:

**GENERAL FEATURES**

- Wall-mounted indoor unit
- Standard Hybrid Catechin Prefilter is included with indoor unit
- Quiet operation
- Auto fan speed control: Quiet, Low, Medium, High, and Super High
- Hand-held Wireless Remote Controller
- Indoor unit powered from outdoor unit using A-Control
- Auto restart following a power outage
- Anti-allergy Enzyme Filter
- Limited warranty: five years parts and seven years compressor

ACCESSORIES**Indoor Unit**

- ☐ Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- ☐ Condensate Pump (Sauermann SI30-115/230; 115/230V)
- ☐ Anti-Allergy Enzyme Filter (MAC-2310FT-E)
- ☐ Drain Pan Level Sensor (DPLS2)

Outdoor Unit

- ☐ Three-pole Disconnect Switch (TAZ-MS303)
- ☐ Air Outlet Guide (MAC-886-SG-E)
- ☐ Mounting Base (DSD-400N)
- ☐ Mounting Pad (ULTRILITE1)
- ☐ Drain Socket Assembly (MAC-860DS)
- ☐ Wall Mounting Bracket (QSWB2000M-1)

Controller Options

- ☐ Wireless Controller (MHK1)
- ☐ Wired Remote Controller PAR-31MAA (Requires MAC-333IF-E)
- ☐ Wireless Interface for kumo cloud™ (PAC-WHS01WF-E)
- ☐ Thermostat Interface (PAC-US444CN-1)

SPECIFICATIONS**Cooling¹**

Rated Capacity 22,500 Btu/h
 Minimum to Maximum Capacity Range 8,200 - 31,400 Btu/h
 SEER 19.0 Btu/h/W
 EER 12.5 Btu/h/W
 Total Rated Input 1,800 W

Heating at 47°F²

Rated Capacity 27,600 Btu/h
 Minimum to Maximum Capacity Range 7,500 - 36,900 Btu/h
 HSPF 10.0 Btu/h/W
 COP 3.46
 Total Rated Input 2,340 W

Heating at 17°F³

Rated Capacity 16,000 Btu/h
 Rated Total Input 1,770 W
 COP 2.64
 Maximum Capacity** 24,600 Btu/h
 Maximum Total Input 3,290 W

Heating at 5°F⁴

Maximum Capacity** 21,160 Btu/h

¹ Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB^{*}

¹ Cooling | Outdoor: 95° F (35° C) DB / 75° F (24° C) WB^{*}

² Heating at 47°F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB^{*}

² Heating at 47°F | Outdoor: 47° F (8° C) DB / 43° F (6° C) WB^{*}

³ Heating at 17° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB^{*}

³ Heating at 17° F | Outdoor: 17° F (-8° C) DB / 15° F (-9° C) WB^{*}

⁴ Heating at 5° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB

⁴ Heating at 5° F | Outdoor: 5° F (-15° C) DB / 5° F (-15° C) WB

^{*} Rating Conditions per AHRI Standard

^{**} Maximum Capacity is at full speed and performance for INVERTER-driven System.

ENERGY STAR® Yes
 ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.

Electrical Requirements

Power Supply 208 / 230V, 1-Phase, 60 Hz
 Breaker Size 20 A

Voltage

Indoor - Outdoor S1-S2 AC 208 / 230V
 Indoor - Outdoor S2-S3 DC ±24V
 Indoor - Remote Controller MHK1 DC 3V
 PAR-31MAA DC 12V
 PAC-YT53CRAU DC 12V

OPERATING RANGE

		Indoor Intake Air Temp.	Outdoor Intake Air Temp.
Cooling ⁴	Maximum	90° F (32° C) DB 73° F (23° C) WB	115° F (46° C) DB
	Minimum	67° F (19° C) DB 57° F (14° C) WB	14° F (-10° C) DB
Heating	Maximum	80° F (27° C) DB 67° F (19° C) WB	75° F (24° C) DB 65° F (18° C) WB
	Minimum	70° F (21° C) DB 60° F (16° C) WB	-4° F (-20° C) DB ⁵ -5° F (-21° C) WB

⁴ Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

⁵ System cuts out at -9° F (-27° C) to avoid thermistor error and automatically restarts at -4° F (-20° C).

Indoor Unit

MCA 1 A
 Blower Motor (ECM) 0.76 F.L.A.
 Airflow (Quiet - Lo - Med - Hi - Super Hi)
 Cooling 388 - 469 - 628 - 738 Dry CFM
 347 - 420 - 562 - 661 Wet CFM
 Heating 388 - 469 - 628 - 738 Dry CFM

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)

Cooling 34 - 41 - 49 - 53 dB(A)
 Heating 32 - 41 - 49 - 52 dB(A)

DIMENSIONS	UNIT INCHES / MM
W	43-5/16 / 1,116
D	9-3/8 / 238
H	12-13/16 / 325

Weight 37 lbs. / 17 kg
 Moisture Removal 2.7 pt./h
 External Finish Munsell No. 1.0Y 9.2 / 0.2
 Field Drainpipe Size O.D. 5/8" / 15.88 mm

Outdoor Unit

Compressor DC Inverter-driven Twin Rotary
 MCA 17.1 A
 Fan Motor (ECM) 0.93 F.L.A.
 Sound Pressure Level
 Cooling 55 dB(A)
 Heating 55 dB(A)

DIMENSIONS	INCHES / MM
W	33-1/16 + 3-3/16 / 840 + 81
D	13 / 330
H	34-5/8 / 880

Weight 119 lbs. / 54 kg
 External Finish Munsell No. 3Y 7.8 / 1.1

Refrigerant Type R410A
 Refrigerant Pipe Size O.D.

Gas Side 5/8" / 15.88 mm
 Liquid Side 3/8" / 6.35 mm

Max. Refrigerant Pipe Length 100' / 30 m


Max. Refrigerant Pipe Height Difference 50' / 15 m

Connection Method Flared

DIMENSIONS: MSZ-GE24NA & MUZ-GE24NA


MSZ-GE24NA

Unit: inch

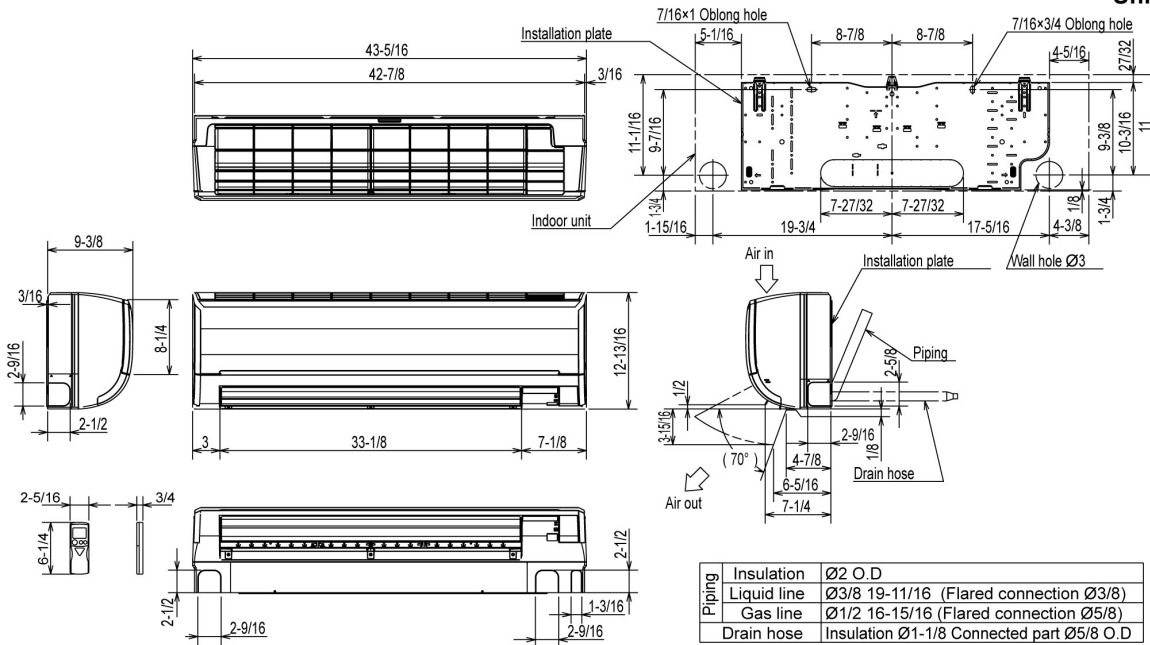

MUZ-GE24NA

Unit: inch

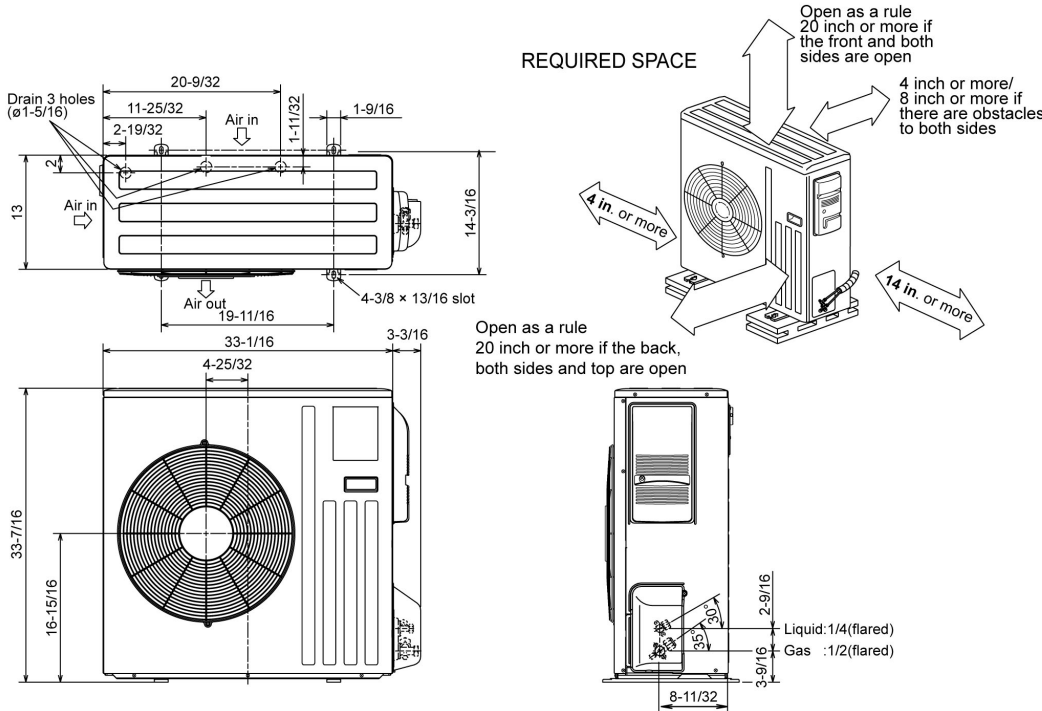

COOLING & HEATING

1340 Satellite Boulevard, Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

