


Model: PAR-31MAA

|                     |                                                                                                                |       |
|---------------------|----------------------------------------------------------------------------------------------------------------|-------|
| Job Name:           | Location:                                                                                                      | Date: |
| Purchaser:          | Engineer:                                                                                                      |       |
| Submitted to:       | For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction |       |
| System Designation: | Schedule No.:                                                                                                  |       |

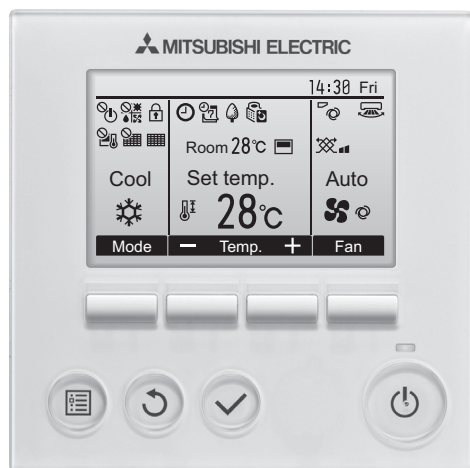

## BACKLIT MA REMOTE CONTROLLER (PAR-31MAA) SPECIFICATIONS


- Controls group operation for up to 16 indoor units in a single group
- Features selectable multi-lingual LCD (English, Spanish, and French)
- Supports both Fahrenheit and Celsius
- User functions allow user to set
  - On/Off
  - Operation modes cool, heat, dry, fan
  - Set temperature
  - Fan speed setting
  - Airflow direction
- Timer Operation:
  - Weekly Timer: On/Off/Temperature setting up to 8 times per day of the week in 1-minute increments
  - Simple Timer: On and Off time can be set once within 72-hour period in 1-hour increments
  - Auto-off Timer: Turns indoor unit Off based on countdown time up to 4-hours in 30-minute increments
- Room Temperature: Displays room temperature sensed either at the indoor unit (default) or at the remote controller
- Set Temperature Range Limit: From the Backlit MA Controller, the allowable set temperature range can be reduced for cool and heat modes
- Special Function Rotation/Backup (Lead/Lag for P-Series)
- Static pressure setting (model dependent)
- Fan speed setting for use with supplemental heating function (model dependent)
- Set P-Series twinning function
- Function Lock Out: Prohibits all functions or all functions except On/Off from the backlit MA controller
- Addressing: No addressing required
- Wiring: connects using two-wire, stranded, non-polar control wire to indoor unit connection terminal or control adapter (MAC-333IF for M-Series) requires crossover wiring for indoor unit grouping
- Dimensions: 4-3/4 x 3/4 x 4-3/4" (120 x 19 x 120 mm)

Notes:


# Model: PAR-31MAA - DIMENSIONS

Unit:mm[in.]

(Front view)

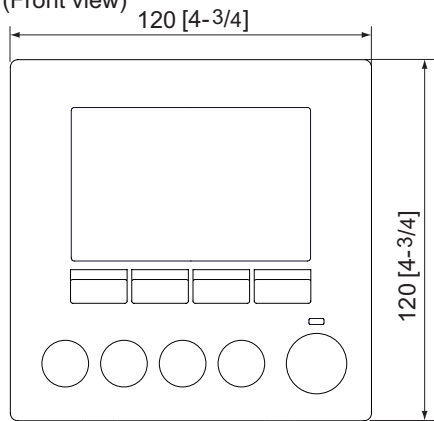

(Side view)



(Rear view)

